







Tornillo autorroscante EJOT® JZ5-8,0

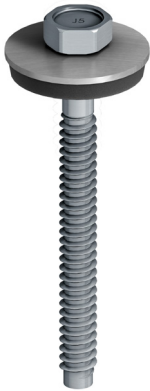

NUEVO



Longitud [mm]	 [mm]		Descripción	Nº artículo
Arandela de sellado E22, Ø 22 mm				
60	0 - 43	250	JZ5-8,0x60 E22	3 190 653 311
80	16 - 63	100	JZ5-8,0x80 E22	3 190 853 311
100	36 - 83	100	JZ5-8,0x100 E22	3 191 053 311
150	86 - 133	100	JZ5-8,0x150 E22	3 191 553 311

Rango de aplicación

- Para fijar perfiles de acero y panel sándwich a subestructuras de acero de hasta S355 (St 52).
- Para intercambiar tornillos con un diámetro de 5,5 y 6,3 mm.

Características:

- Acero inoxidable A2 con cuerpo de tornillo en acero endurecido.
- Arandela de sellado premontada de acero inoxidable.

Especificaciones técnicas

Diámetro	8,0 mm
Accionamiento	Hexagonal SW 13
Velocidad de rotación instalación	máx. 800 rpm

Referencias cruzadas

Vaso K-SW13-1/4"x50	227
Atornilladora ASCS 6,3	206
Cubreondas ORKAN	176
Broca HSS	220