

HTK-2G/TKE (loose, pre-assembled)



Cross references

DABO® TKR-4.8
 Stress plate HTK-2G 50
 Bit cross recess
 Bit extension with spring pin
 Hip belt flat roof


Application range

- > To fix roofing membranes and insulating material to substructures made of sheet steel $\geq 0.70 \text{ mm} \leq 1.5 \text{ mm}$, timber or wood-based material
- > New buildings and renovations (observe layer design)
- > For the installation with ECOSET HTK installation tool up to 280 mm total panel thickness
- > For special requirements of resistance to imposed loads
- > To reduce thermal bridges


Properties

- > Stress plate: high-grade plastic material
- > DABO® screw TKE = A4 stainless steel
- > Telescope design for resistance to imposed loads
- > Combinations for total panel thicknesses up to 605 mm possible
- > Processing in an upright position possible with the bit extension with spring pin or with the ECOSET HTK installation tool


HTK-2G-TKE-60-35/50

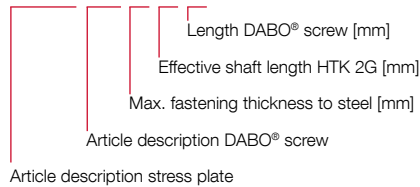

Applications



Technical specifications



Certifications



Conforms to the requirements according to VOB and the application class K2 according to DIN 18531 regarding the corrosion resistance

Product online



Order description	Total panel thickness [mm]	Effective Shaft length L [mm]	Screw length [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
HTK-2G-TKE-80-55/50-loose, pre-assembled	80	55	50	100		3705505026	4061245059839
HTK-2G-TKE-100-55/70-loose, pre-assembled	100	55	70	100		3705507026	4061245059846
HTK-2G-TKE-120-95/50-loose, pre-assembled	120	95	50	100		3709505026	4061245059853
HTK-2G-TKE-140-95/70-loose, pre-assembled	140	95	70	100		3709507026	4061245059860
HTK-2G-TKE-160-115/70-loose, pre-assembled	160	115	70	100		3711507026	4061245059884
HTK-2G-TKE-180-145/60-loose, pre-assembled	180	145	60	100		3714506026	4061245059891
HTK-2G-TKE-200-145/80-loose, pre-assembled	200	145	80	100		3714508026	4061245059907
HTK-2G-TKE-220-145/100-loose, pre-assembled	220	145	100	100		3714510026	4061245059921
HTK-2G-TKE-240-145/120-loose, pre-assembled	240	145	120	100		3714512026	4061245060019
HTK-2G-TKE-260-145/140-loose, pre-assembled	260	145	140	100		3714514026	4061245060026
HTK2G-TKE-280-145/160-loose, pre-assembled	280	145	160	100		3714516026	4061245060033
HTK2G-TKE-300-145/180-loose, pre-assembled	300	145	180	100		3714518026	4061245074191

Order information: For timber substructures, screws need to be chosen 10 mm longer.

Further lengths available upon request

