

EJOT® SUPER-SAPHIR **self-drilling screw JT3-18-5.5**

Fastening profiled steel and aluminium sheet and sandwich panels to steel substructures with 18 mm total drilling performance

Self-drilling screws JF3/JT3

A2 stainless steel with hardened steel point / steel drill point

EJOT®

EJOT® SUPER-SAPHIR self-drilling screw JT3-18-5.5

Ø [mm]	Length [mm]	Clamp thickness [mm]	PU	Price/100 [EUR]	Order description	Article number
Sealing washer E16, Ø 16 mm						
5.5	55	0 - 18	500		JT3-18-5.5x55-E16	3 593 011 381

Application area

- Fastening profiled steel and aluminium sheet and sandwich panels to 4-16 mm steel substructure
- Fastening profiled aluminium sheet and sandwich panels to 4–18 mm aluminium substructure


Properties


- A2 stainless steel with hardened drill point
- Stainless steel sealing washer
- Pre-assembled sealing washer

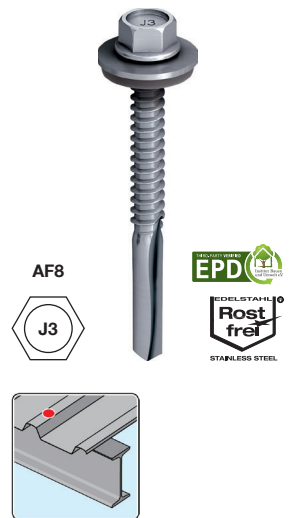
Technical Data

Drilling capacity $t_1 + t_2$	1.0 + 18.0 mm / 2.0 + 16.0 mm
Drive	Hexagon AF8

WWW.AUSSCHREIBEN.DE

Minimum tensile strength	
	
Ø mm	kN
5.5	10.0

Minimum shear strength	
	
Ø mm	kN
5.5	7.5



Cross reference

Accessories
 ORKAN storm washers
 Self-tapping screw JZ3-6.3
 Metal screwdriver SCS 6.3
 Metal screwdriver SCS 6.3-SH2